

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Lindab circular spiral duct
Lindab Safe & Safe Click

Oy Lindab AB, Finland

EPD Registration number: HUB-1708

Version: 2.0

Publication date: 24.11.2024

Valid until: 24.11.2029

Revision date: 09.01.2025



GENERAL INFORMATION

MANUFACTURER

Manufacturer	Oy Lindab AB
Address	Juvan teollisuuskatu 3, 02920 Espoo, Finland
Contact details	info.finland@lindab.com
Website	https://www.lindab.fi/

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.1, 5 Dec 2023
Sector	Construction product
Category of EPD	Sister EPD to HUB-0506
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	Cecilia Cederek
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
EPD verifier	Haiha Nguyen, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.



PRODUCT

Product name	Circular ventilation duct, folded Lindab Safe & Safe Click
Additional labels	SR, SRT
Product reference	-
Place of production	Espoo, Jyväskylä
Period for data	2023
Averaging in EPD	Multiple factories
Variation in GWP-fossil for A1-A3	+1,7 %

More information on page 7.

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 kg of circular ventilation duct
Declared unit mass	1 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	2,82
GWP-total, A1-A3 (kgCO ₂ e)	2,81
Secondary material, inputs (%)	5,06
Secondary material, outputs (%)	94
Total energy use, A1-A3 (kWh)	9,96
Total water use, A1-A3 (m ³ e)	0,85

MANUFACTURER

ABOUT LINDAB

Lindab is a leading ventilation company in Europe, offering solutions for energy-efficient ventilation and a healthy indoor climate. The products are characterised by high quality, ease of installation and environmental thinking. In northern Europe, Lindab also offers an extensive range of roof, wall and rainwater systems.

FOR A BETTER CLIMATE

We want to create a better climate. Most of us spend the majority of our time indoors. The air we breathe, in our homes, at our workplaces and at school, affects our well-being. Since air is not visible, we do not always think about it. However, the indoor climate is crucial for how we feel, for our energy levels, and whether we stay healthy. Lindab wants to contribute to the architecture and indoor climate of tomorrow. We also want a better climate for our planet. That is why we develop energy-efficient solutions for healthy indoor environments



OUR VISION

We want to be the leading player in the area in which we are strongest – ventilation in Europe. We focus on air distribution and air diffusion. Since we offer high-quality products, we focus on Europe where demand for good ventilation is high, and we can offer superior availability. We specialise in those parts of the ventilation system where we are the strongest. We adapt our offering to the local market, with our core ventilation offering as the clear common denominator in all markets.

THE IMPORTANCE OF VENTILATION

About 90 percent of the global population breathes poor air every day. A common misconception is that outdoor air is more polluted due to emissions, smog, and harmful chemicals. In fact, indoor air in homes, schools, offices, and factories can be as much as five times more polluted. People nonetheless spend most of their life indoors. The most common causes of indoor air pollution are mould; chemicals in, for example, furniture and building materials; dust; radon; and cigarette smoke; but above all, airborne particles from combustion and industrial processes, which are so small they can enter the human bloodstream via the respiratory system. Today, air pollution is a risk factor in several of the world's most common causes of death, including heart disease, pneumonia, stroke, diabetes, and lung cancer. Ventilation is an efficient and convenient method to remove those indoor air pollutants.

SUSTAINABILITY PLAN

For us, sustainability is a way of thinking and working. This affects how we work with Lindab's strategy in all areas. Everything from the purchases we make, to the deliveries and the service we offer our customers. Lindab has three long-term, non-financial targets for the business, one that focuses on increasing our attractiveness as an employer, one for reducing our own carbon dioxide emissions, and one for a better working environment.

Read more about Lindab's sustainability work and non-financial targets on www.lindabgroup.com



STEEL – A SUSTAINABLE MATERIAL

Steel provides products with a long service life. Steel has many advantages over other materials – it has a very long service life, is non-combustible and meets hygiene requirements. Steel is a fully recyclable material and scrap steel has a strong market position: steel recovered from structures and end products at the end of their lifecycle is efficiently recycled and re-used. We prioritise cooperation with steel suppliers driving development towards fossil-free steel and whose carbon dioxide intensity values are good. The steel we use must be free of particularly hazardous substances.

The use of steel in Lindab's products is what contributes most to Lindab's CO₂ emissions. The transition to fossil-free steel is Lindab's most significant individual action in terms of its effect on the environment. Through our collaboration with SSAB and H2 Green Steel, we will also be among the first in Europe to have access to CO₂ reduced steel in 2026. When it becomes available, we will make use of it in a green product line.

PRODUCT

PRODUCT DESCRIPTION

Lindab circular spiral duct is ventilation duct for air distribution to provide ventilation of buildings when used with Lindab Safe duct fittings.

The product SRT is certified by Eurovent for airtightness class D as part of the Lindab Safe air duct system. SRT has Eurofins certificate for ventilation duct as part of Lindab Safe system.



Further information can be found at www.lindab.fi.

PRODUCT RAW MATERIAL MAIN COMPOSITION VP

Raw material category	Amount, mass- %	Material origin
Metals	100 %	EU
Minerals	-	-
Fossil materials	-	-
Bio-based materials	-	-

BIOGENIC CARBON CONTENT VP

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0,001

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 kg
Mass per declared unit	1 kg
Functional unit	-
Reference service life	>50 years

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm). More detailed information about the products material content can be found in the Building Product Declaration available [online](#).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The steel raw material is received, and goods inwards control is performed. The correct slitted coil is selected according to the manufacturing order. The unique ID number is connected to the manufacturing order for traceability.

The Lindab circular ducts are then rolled to wanted shape by spiro machines. Replicating oil emulsion is used during the process to reduce the wear of machines and to ensure stable production conditionings.

The steel is Hot-Dip galvanized steel. Electricity source is from biomass energy. Wooden crates and plastic foils are used as packaging.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions. Installation spills and handling of packaging material is considered. Material loss during installation is estimated to be zero.

Transport from production place to user (A4)

Type	Destination	Transportation method
Transportation	50 km	Lorry

PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase. These life cycle stages are dependent on how the product is used and should be developed and included as part of a holistic assessment of specific construction works.

PRODUCT END OF LIFE (C1-C4, D)

Energy (0,1kWh) for deconstruction is included in C1. Activities related to steel recycling is included in C3. A recycling rate of 95% and landfill rate of 5% has been assumed for the product. (According to World Steel Association, 2017) That is to be seen as the proportion of the material in the product that will be recycled in a subsequent system. External scrap in the raw material is also deducted and accounts for 20%. Hence the net flow to be credited in module D is 76%

See below tables for scenarios used in Modules C and D.

Transport to waste processing scenario (A5, C2)

Type	Distance
Lorry	40 km

End of Life Scenarios based on Eurostat. (A5, C1-C4, D)

Name	%
Steel to recycling	95*
Steel to landfill	5*
Plastic to recycling	21***
Plastic to incineration	77***
Plastic to landfill	2***
Wood reused	4**
Wood to energy recovery	96**



According to :

*: World Steel Association 2017

** : European statistics CEDEN BioReg 2018

***: Plastic Europe statistics 2022

MANUFACTURING PROCESS

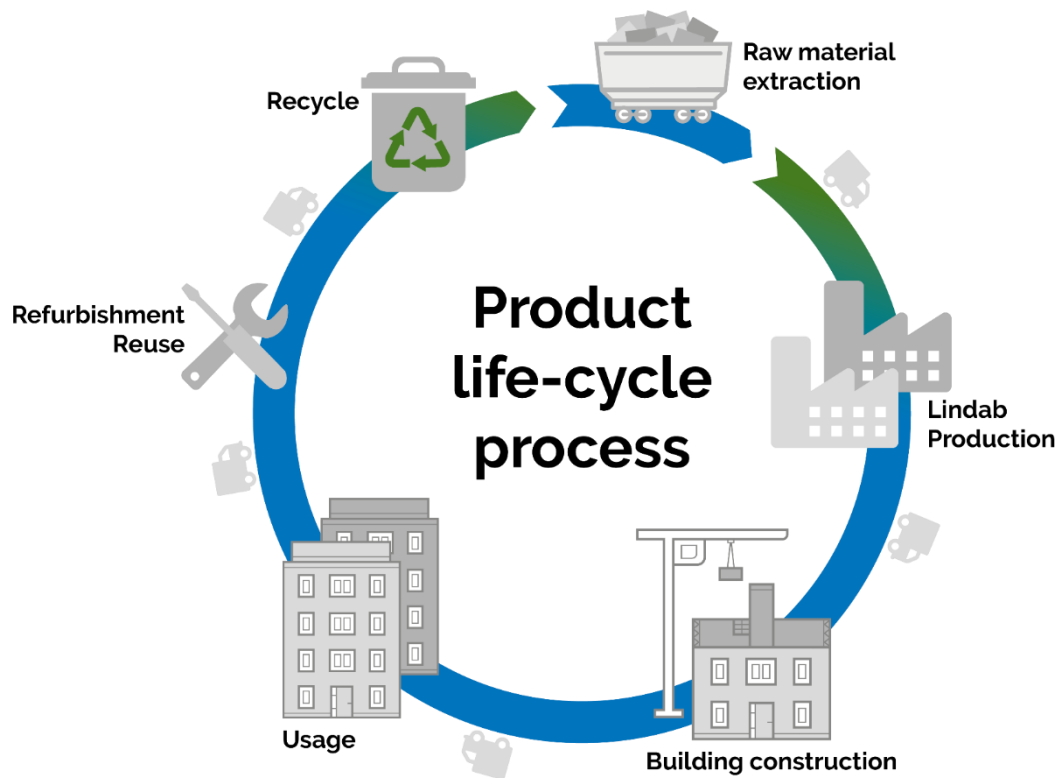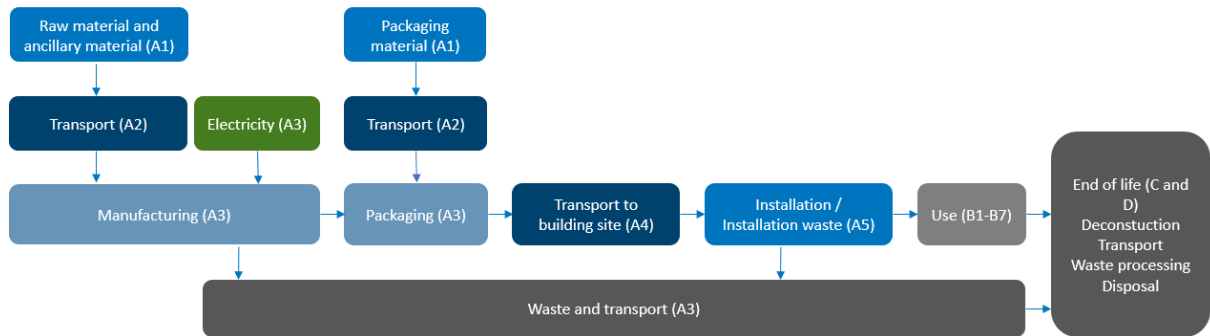

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. While cut-off criteria according to the PCR were employed, much data which would have fallen within that scope were included regardless, if available, resulting in a data set which is robust and captures all significant contributors to the LCA results.

There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	Allocated by mass or volume
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	Multiple factories
Averaging method	Averaged by shares of total mass
Variation in GWP-fossil for A1-A3	+1,7 %

The representation of average is the 305 / FAM-137-Z275-0.50 from the Espoo production unit.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Data from Lindab Steel has been used to represent the raw material. For other inputs Ecoinvent and One Click LCA databases were used as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – TOTAL¹⁾	kg CO ₂ e	2,68E+00	9,76E-02	3,41E-02	2,81E+00	5,09E-03	3,30E-02	MND	MND	MND	MND	MND	MND	MND	2,70E-02	3,72E-03	2,06E-02	2,64E-04	- 1,25E+00
GWP – FOSSIL	kg CO ₂ e	2,68E+00	9,75E-02	3,91E-02	2,82E+00	5,09E-03	2,79E-02	MND	MND	MND	MND	MND	MND	MND	2,67E-02	3,72E-03	2,06E-02	2,63E-04	- 1,25E+00
GWP – BIOGENIC	kg CO ₂ e	0,00E+00	0,00E+00	-5,15E-03	-5,15E-03	0,00E+00	5,15E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-2,29E-04
GWP – LULUC	kg CO ₂ e	4,80E-04	4,41E-05	1,29E-04	6,54E-04	1,88E-06	1,77E-06	MND	MND	MND	MND	MND	MND	MND	2,40E-04	1,37E-06	2,70E-05	2,49E-07	-2,92E-04
OZONE DEPLETION POT.	kg CFC-11e	1,00E-08	2,30E-08	1,38E-07	1,71E-07	1,17E-09	1,31E-10	MND	MND	MND	MND	MND	MND	MND	1,51E-09	8,55E-10	2,55E-09	1,07E-10	-5,00E-08
ACIDIFICATION POTENTIAL	mol H ⁺ e	6,67E-03	1,09E-03	5,39E-04	8,30E-03	2,15E-05	8,64E-06	MND	MND	MND	MND	MND	MND	MND	1,17E-04	1,57E-05	2,61E-04	2,48E-06	-5,36E-03
EP-FRESHWATER R²⁾	kg Pe	2,90E-06	5,96E-07	3,24E-06	6,73E-06	4,17E-08	6,96E-08	MND	MND	MND	MND	MND	MND	MND	1,04E-06	3,04E-08	1,10E-06	2,76E-09	-5,17E-05
EP-MARINE	kg Ne	1,57E-03	2,67E-04	1,45E-04	1,98E-03	6,40E-06	2,71E-06	MND	MND	MND	MND	MND	MND	MND	1,86E-05	4,68E-06	5,52E-05	8,57E-07	-1,10E-03
EP-TERRESTRIAL	mol Ne	1,67E-02	2,96E-03	2,30E-03	2,20E-02	7,06E-05	2,94E-05	MND	MND	MND	MND	MND	MND	MND	2,24E-04	5,16E-05	6,39E-04	9,43E-06	-1,32E-02
POCP (“SMOG”)³⁾	kg NMVO Ce	5,25E-03	8,39E-04	4,49E-04	6,54E-03	2,26E-05	7,80E-06	MND	MND	MND	MND	MND	MND	MND	5,98E-05	1,65E-05	1,76E-04	2,74E-06	-6,35E-03
ADP-MINERALS & METALS⁴⁾	kg Sbe	1,66E-04	2,07E-07	1,66E-07	1,67E-04	1,19E-08	5,44E-09	MND	MND	MND	MND	MND	MND	MND	3,35E-07	8,71E-09	2,77E-06	6,05E-10	-2,34E-05
ADP-FOSSIL RESOURCE	MJ	2,79E+01	1,47E+00	9,15E-01	3,03E+01	7,64E-02	2,03E-02	MND	MND	MND	MND	MND	MND	MND	8,02E-01	5,58E-02	2,79E-01	7,22E-03	- 1,10E+01
WATER USE⁵⁾	m ³ e depr.	5,17E-01	6,16E-03	4,70E-02	5,70E-01	3,42E-04	1,16E-03	MND	MND	MND	MND	MND	MND	MND	1,73E-02	2,50E-04	5,41E-03	2,29E-05	-2,29E-01

¹⁾ GWP = GLOBAL WARMING POTENTIAL; ²⁾ EP = EUTROPHICATION POTENTIAL. REQUIRED CHARACTERISATION METHOD AND DATA ARE IN KG P-EQ. MULTIPLY BY 3,07 TO GET PO.E; ³⁾ POCP = PHOTOCHEMICAL OZONE FORMATION; ⁴⁾ ADP = ABIOTIC DEPLETION POTENTIAL; ⁵⁾ EN 15804+A2 DISCLAIMER FOR ABIOTIC DEPLETION AND WATER USE AND OPTIONAL INDICATORS EXCEPT PARTICULATE MATTER AND IONIZING RADIATION, HUMAN HEALTH. THE RESULTS OF THESE ENVIRONMENTAL IMPACT INDICATORS SHALL BE USED WITH CARE AS THE UNCERTAINTIES ON THESE RESULTS ARE HIGH OR AS THERE IS LIMITED EXPERIENCE WITH THE INDICATOR.

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e	2,68E+00	9,75E-02	3,91E-02	2,82E+00	5,09E-03	2,79E-02	MND	MND	MND	MND	MND	MND	MND	2,67E-02	3,72E-03	2,06E-02	2,63E-04	- 1,25 E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013). In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated in line with the guidance of IES PCR 1.2.5 Annex 1. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

USE OF NATURAL RESOURCES

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
RENEW. PER AS ENERGY ⁹⁾	MJ	1,92E+00	1,68E-02	2,77E+00	4,71E+00	8,61E-04	2,30E-03	MND	MND	MND	MND	MND	MND	MND	1,97E-01	6,29E-04	4,95E-02	6,27E-05	- 2,11E+0 0
RENEW. PER AS MATERIAL	MJ	0,00E+00	0,00E+00	4,71E-02	4,71E-02	0,00E+00	-4,71E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+0 0
TOTAL USE OF RENEW. PER	MJ	1,92E+00	1,68E-02	2,82E+00	4,75E+00	8,61E-04	-4,48E-02	MND	MND	MND	MND	MND	MND	MND	1,97E-01	6,29E-04	4,95E-02	6,27E-05	- 2,11E+0 0
NON-RE. PER AS ENERGY	MJ	2,92E+01	1,47E+00	5,00E-01	3,11E+01	7,64E-02	2,03E-02	MND	MND	MND	MND	MND	MND	MND	8,02E-01	5,58E-02	2,79E-01	7,22E-03	- 1,09E+0 1
NON-RE. PER AS MATERIAL	MJ	0,00E+00	0,00E+00	4,07E-01	4,07E-01	0,00E+00	-4,07E-01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+0 0
TOTAL USE OF NON-RE. PER	MJ	2,92E+01	1,47E+00	9,07E-01	3,15E+01	7,64E-02	-3,87E-01	MND	MND	MND	MND	MND	MND	MND	8,02E-01	5,58E-02	2,79E-01	7,22E-03	- 1,09E+0 1
SECONDARY MATERIALS	kg	5,06E-02	4,57E-04	1,91E-04	5,12E-02	2,12E-05	1,69E-05	MND	MND	MND	MND	MND	MND	MND	6,72E-05	1,55E-05	3,10E-04	1,52E-06	7,05E- 01
RENEW. SECONDARY FUELS	MJ	5,48E-23	3,20E-06	8,29E-05	8,61E-05	2,14E-07	9,93E-08	MND	MND	MND	MND	MND	MND	MND	3,05E-07	1,56E-07	1,61E-05	3,96E-08	-1,14E- 04
NON-REN. SECONDARY FUELS	MJ	6,43E-22	0,00E+00	0,00E+00	6,43E-22	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+0 0
USE OF NET FRESH WATER	m ³	2,98E-03	1,70E-04	8,43E-01	8,46E-01	9,90E-06	1,39E-05	MND	MND	MND	MND	MND	MND	MND	7,12E-04	7,23E-06	1,64E-04	7,90E-06	-2,83E- 03

⁹⁾ PER = PRIMARY ENERGY RESOURCES.

END OF LIFE – WASTE

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HAZARDOUS WASTE	kg	4,44E-02	1,64E-03	3,62E-03	4,96E-02	1,01E-04	7,78E-05	MND	MND	MND	MND	MND	MND	MND	1,77E-03	7,40E-05	1,90E-03	0,00E+00	-4,10E-01
NON-HAZARDOUS WASTE	kg	1,33E-01	2,46E-02	9,91E-02	2,56E-01	1,66E-03	1,19E-02	MND	MND	MND	MND	MND	MND	MND	4,52E-02	1,22E-03	6,05E-02	5,00E-02	1,99E+00
RADIOACTIVE WASTE	Kg	4,68E-04	1,02E-05	1,19E-06	4,79E-04	5,11E-07	1,21E-07	MND	MND	MND	MND	MND	MND	MND	8,43E-06	3,73E-07	1,63E-06	0,00E+00	1,68E-06

END OF LIFE – OUTPUT FLOWS

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
COMPONENTS FOR RE-USE	kg	4,29E-06	0,00E+00	0,00E+00	4,29E-06	0,00E+00	3,00E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MATERIALS FOR RECYCLING	kg	2,60E-02	0,00E+00	2,02E-02	4,62E-02	0,00E+00	2,30E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,40E-01	0,00E+00	0,00E+00
MATERIALS FOR ENERGY REC	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,10E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EXPORTED ENERGY	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,22E-01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online](#)

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

HaiHa Nguyen, as an authorized verifier acting for EPD Hub Limited
24.11.2024



ANNEX: CONVERSION TO WEIGHT PER METER

This table presents representative standard size for circular ducts.

All circular ducts can have different lengths, dimensions, with or without end cap, with or without click function.

Diameter of duct (mm)	Length of duct (mm)	Standard weight (kg/m)
63	3000	0.89
80	3000	1.01
100	3000	1.27
125	3000	1.57
160	3000	2.02
200	3000	2.56
250	3000	3.18
315	3000	4.01
400	3000	7.40
500	3000	9.54
630	3000	12.02
800	3000	14.78
1000	3000	24.10
1250	3000	30.20
1600	3000	54.80